
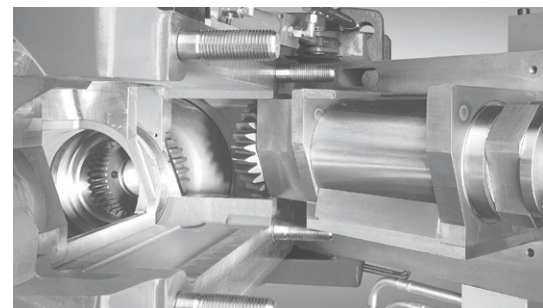
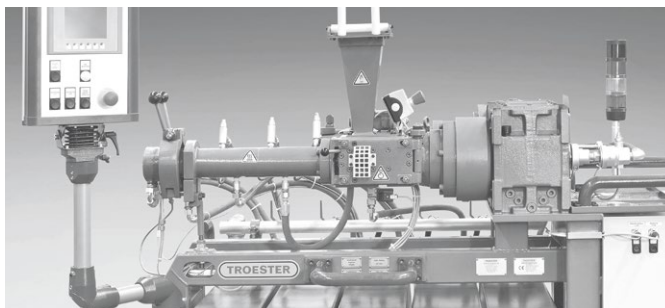


CV Lines for the Production of Rubber Cables




TROESTER

EXCELLENCE IN EXTRUSION.

CV Lines for the Production of Rubber Cables

Rubber compounds are used for various applications where for example flexibility or chemical resistance of the cable is required.

The rubber cables are vulcanized with saturated steam at pressures of 18 - 24 bar. According to cable weight and cable diameter, the cables are produced either on Horizontal Rubber CV-Lines or on Catenary Rubber CCV-Lines.

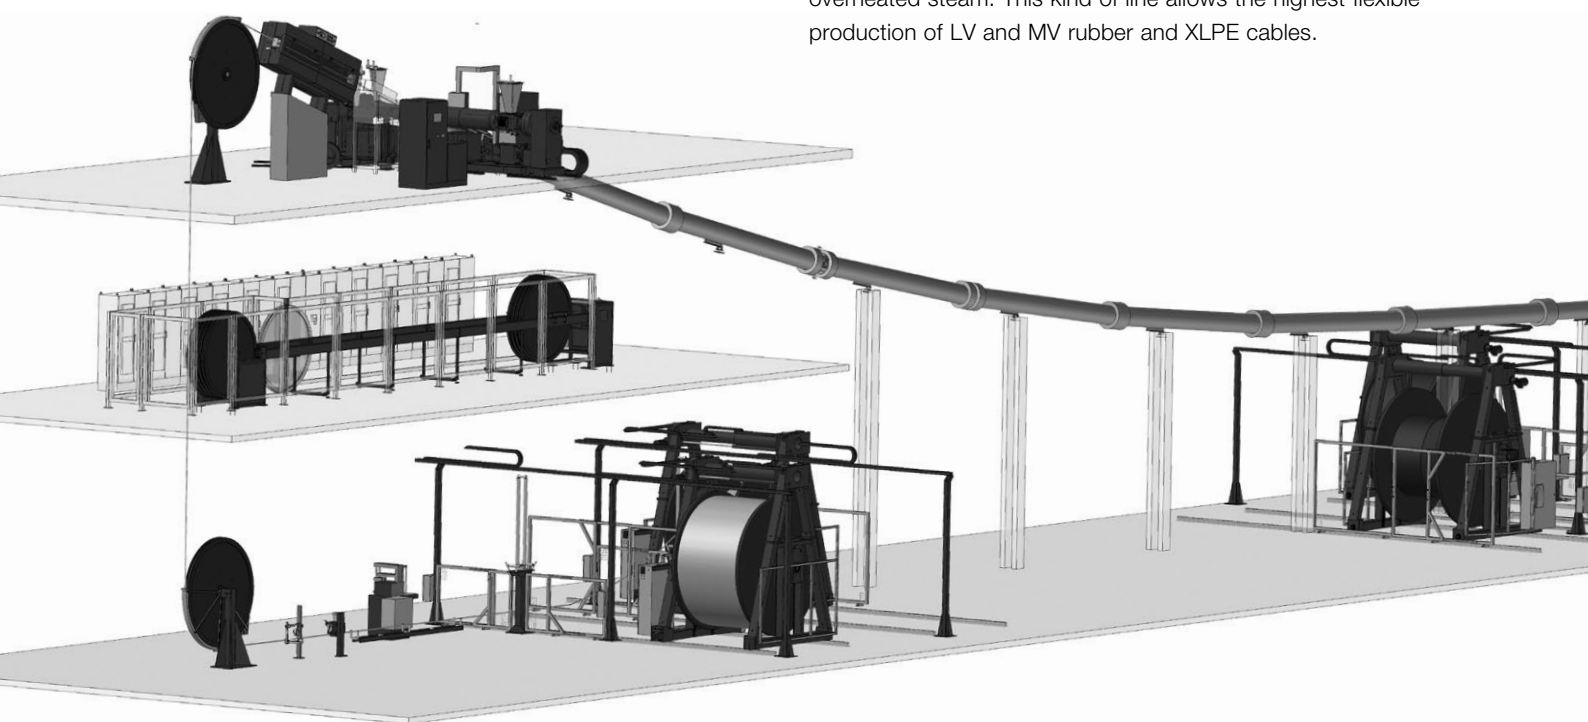

Conductors with small diameters and low wall thicknesses are manufactured in horizontal CV lines. In this case, however, the beginning of the curing section is slightly declined and the CV tube runs out horizontally. For larger weights, the use of a catenary CCV line is required.

In case of limited space availability a turnaround autoclave can be installed to increase the output of the line. To avoid deformations when sheathing sensitive cables, lower steam pressures of 4 -7 bar can be applied. Nevertheless, economic speeds are achievable by using overheated steam.

Different rubber material properties required different curing and cooling processes. The application of several water overflows allows the flexible adjustment of the curing/cooling ration to optimally meet the individual requirements and to achieve the best line performances.


The lines are equipped with up to 3 extruders to produce cables in various designs: 1- or 2-layer insulation or sheathing, additional stripes or skin layers or 3-layer extrusion for medium voltage cables. Special tools and equipment allow the production of flat cables as well. A TROESTER developed line control system which is optimally matched to rubber CV lines ensures safe and easy handling and operation.

Combined Rubber & XLPE Extrusion Lines, Overheated Steam


For the flexible production of Rubber and XLPE MV Cables on the same line, combined lines for such purposes are available. To meet each process the best way the line can be equipped with both, steam and nitrogen curing circuits and either combined or individual extruders for each material. The CV tube is equipped with heating zones which also allows to operate the line in with overheated steam. This kind of line allows the highest flexible production of LV and MV rubber and XLPE cables.

Main Advantages of Rubber CV Lines from TROESTER


- > Flexible and efficient production over a wide product range
- > Excellent core tolerances by state-of-the-art extrusion technology
- > Special designed Rubber Extruders GS
- > Pin-type Extruder QSM for additional compound mixing
- > High line speeds due to optimum division of the heating and cooling section
- > 1- and 2-layer rubber insulation and sheathing
- > Skin and stripe extrusion
- > Medium Voltage (35 kV) triple extrusion process
- > Overheated Steam for sensitive products
- > Innovative line concepts (customized lines fit to special customers requirements)
- > Combined Rubber- and XLPE-Extrusion lines
- > Flat-Cable production
- > State-of-the-art line control
- > Over 120 years of experience in rubber processing technology

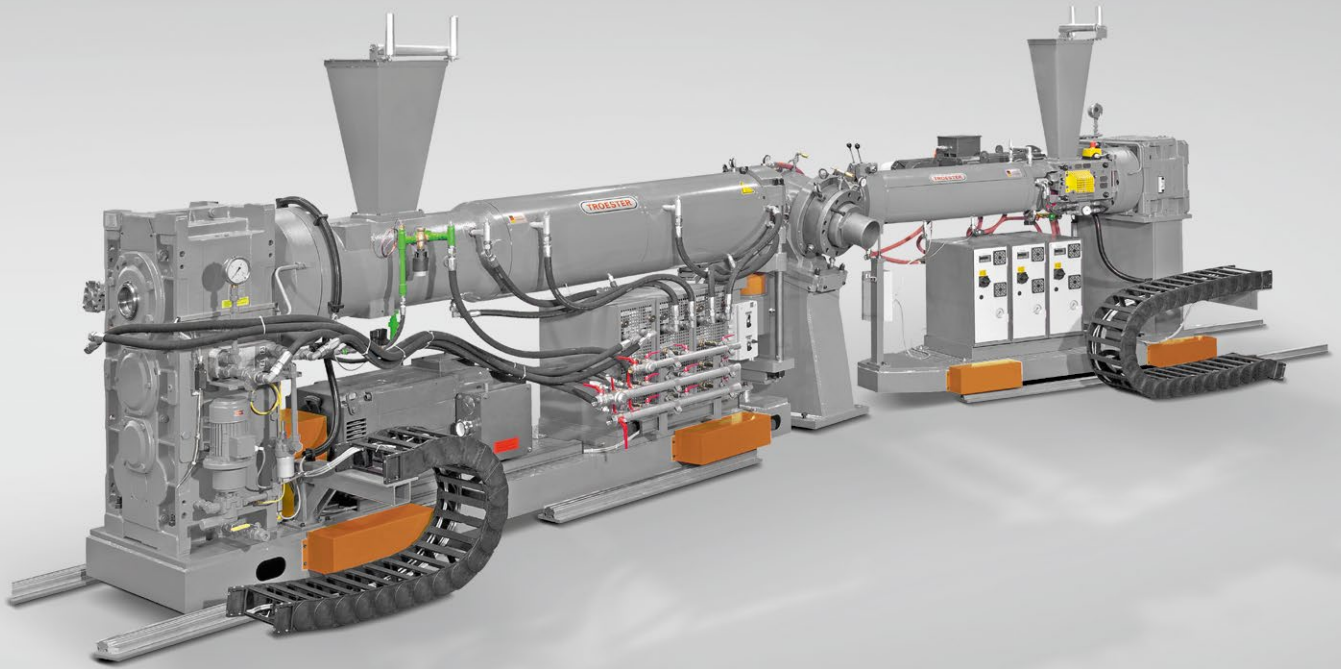


Extruder Group for 2-Layer extrusion

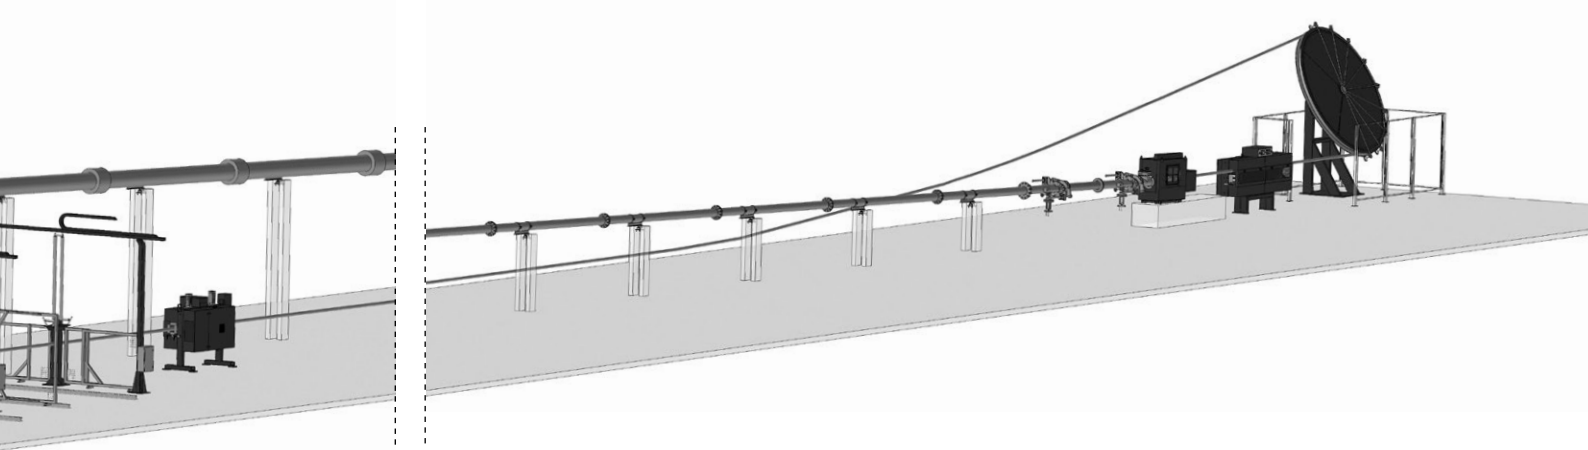

Portal Winder AWB

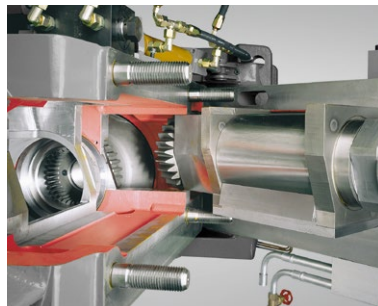

Feed roll in Hopper section

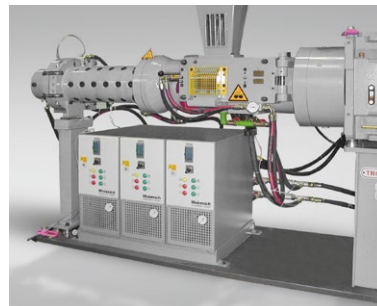

Pin-type Extruder QSM




Embossing Unit

Materials to Process


EPDM ethylene propylene rubber
NBR butadiene acryNitril rubber
CPE chlorinated polyethylene rubber
CSPE chlorosulphonated polyethylene

CR polychloroprene
NR natural rubber
EVA ethylene venylacetate rubber
CM chlorinated polyethylene
SC Rubber semi-conductive rubber
Silicone rubber

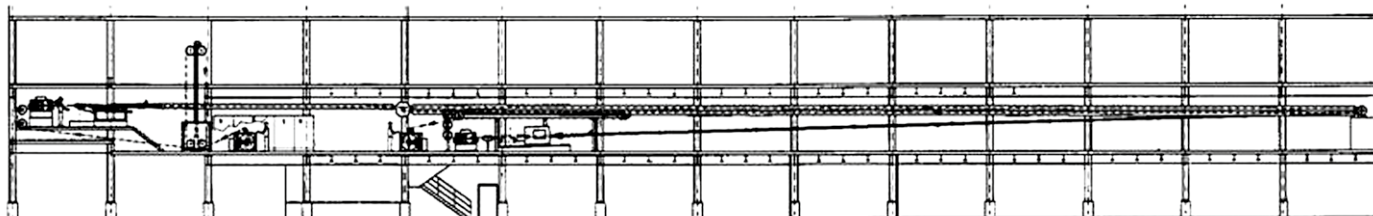

Horizontal Rubber CV Line Line Characteristic (Example)

Insulation		
Voltage class	kV	1
Conductor cross section Cu/Al	mm ²	0,75 - 35
Wall thickness	mm	0,5 - 3,6
Cable diameter max.	mm	14,2
Sheathing		
Inlet diameter	mm	5,5 - 17,0
Wall thickness	mm	1,0 - 3,3
Cable outer diameter	mm	8,0 - 23,0
Cable weight max.	kg/m	1,0
Tube length	m	100
Extruder group		60/120

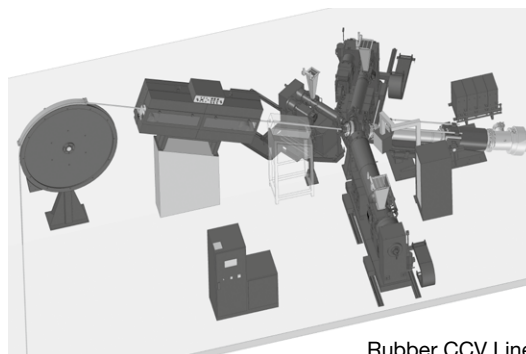

Rubber CCV Line

Catenary Rubber CCV Line Line Characteristic (Example)



Rubber CCV Line

Insulation		
Voltage class	kV	1 - 35
Conductor cross section Cu/Al	mm ²	25 - 1000
Wall thickness		
Inner semi-conductor	mm	0,5 - 2,0
Insulation	mm	2,5 - 12,0
Outer semi-conductor	mm	0,5 - 2,0
Cable diameter max.	mm	72,0
Sheathing		
Inlet diameter max.	mm	100,0
Wall thickness	mm	2,0 - 12,5
Cable outer diameter	mm	125,0
Flat cables		
Inlet diameter max.	mm	40,0
Cable width before cross head max.	mm	90,0
Total wall thickness	mm	2,0 - 12,5
Cable width after cross head max.	mm	110,0
Cable construction	mm	40,0 x 110,0
Cable weight max.	kg/m	16
Tube length	m	142
Extruder group		60/150/90

TROESTER

EXCELLENCE IN EXTRUSION.

TROESTER GmbH & Co. KG
Am Brabrinke 1-4
30519 Hannover, GERMANY
Phone +49-511-87040
Fax +49-511-864028
E-mail innovations@troester.de
www.troester.de

**TROESTER
North & Central America**
Cable and Compounding Machinery
875 Elm Street, Apt 215
Manchester, NH 03101, USA
Phone +1-603-218-3084
Cell +1-603-867-3105
E-mail eugenio.urbina@troester-group.com

**TROESTER Machinery
(Shanghai) Co., Ltd.**
Workshop No. 1, Area C
No. 6999 Chuan'sha Road, Pudong
Shanghai 201202, PR CHINA
Phone +86-21-58598308
Fax +86-21-58598310
E-mail info@troester.cn
www.troester.cn

TROESTER Moscow
Representation Office
2nd Sinichkina St. 9A, Bldg 3
Moscow, 111020, RUSSIA
Phone +79169280672
E-mail alexey.soloshenko@troester-group.com

X-Compound GmbH
Hardmatt 932
CH -5082 Kaisten, Switzerland
Phone +41-62-869 10 30
Fax +41-62-874 32 08
E-mail info@x-compound.com
www.x-compound.com