



TROESTER


TREAD CUTTING MACHINE

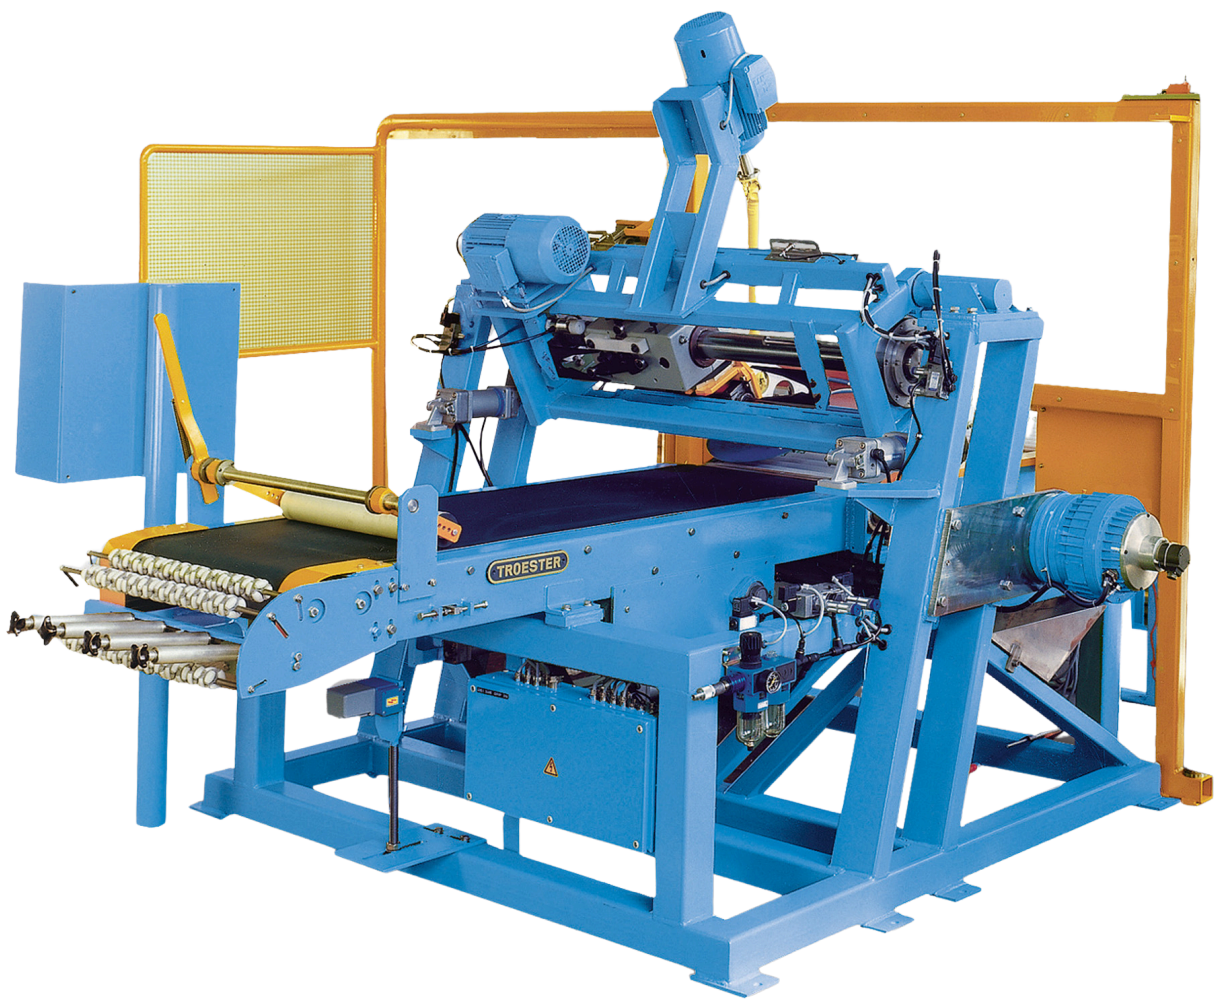

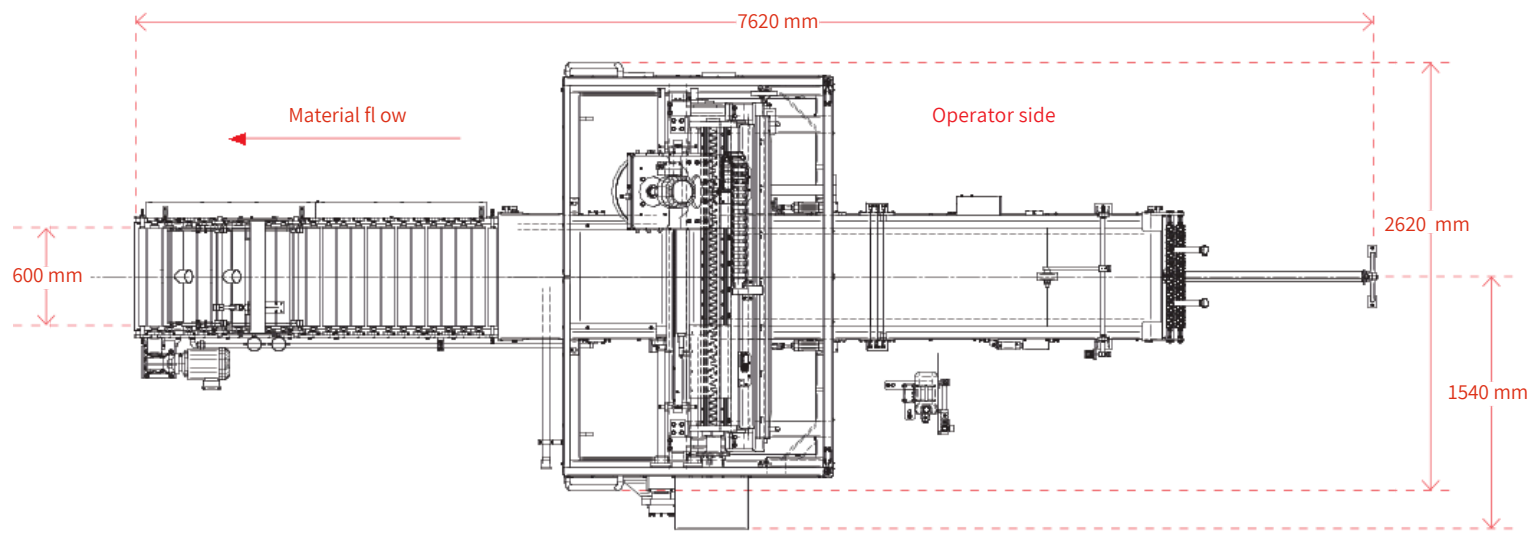


TROESTER TREAD CUTTING MACHINE AT A GLANCE:

- Start/Stop operation
- For passenger car (up to 2800 mm length) and truck treads (up to 4000 mm length)
- Programmable control system easily integrated into existing equipment

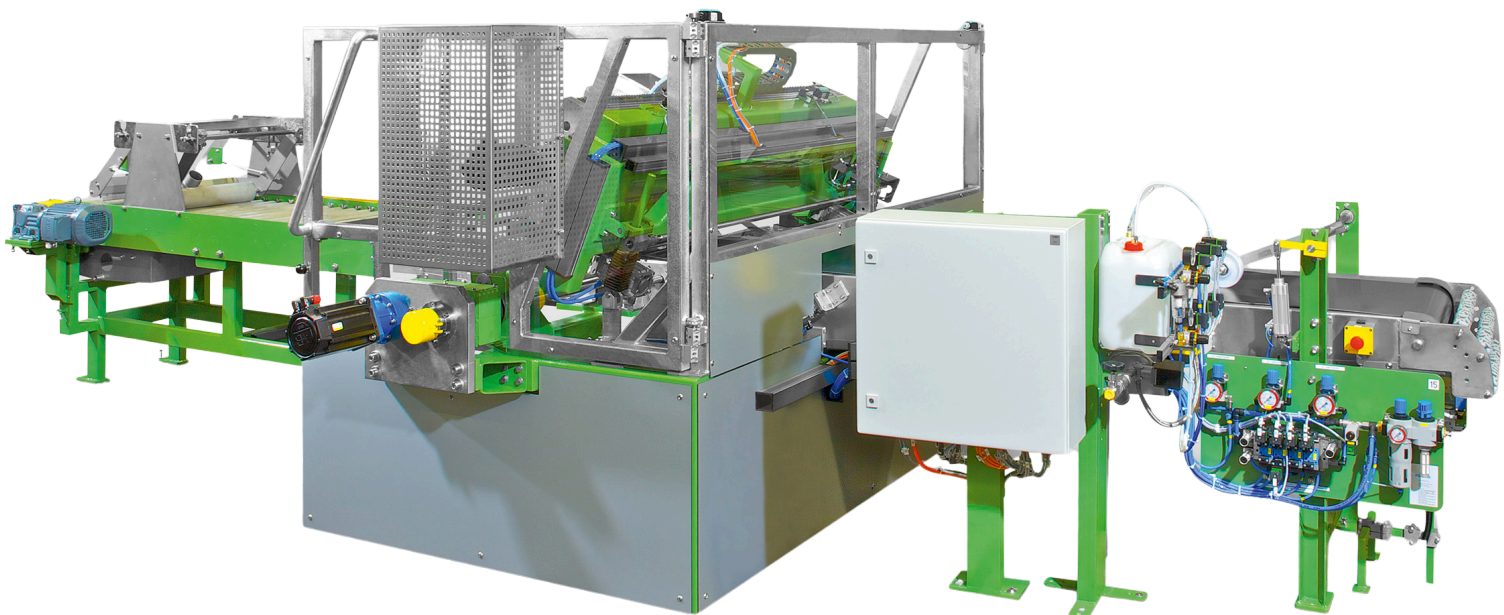

Knife carriage with traversing device



Technical Data	TC 700 / Passenger tires	TC 1000 / Truck tires
Max. tread length, approx. mm	2800	4000
Min. tread length, approx. mm	1500	Client requirement
Tread thickness, max. mm	25	50
Cutting angle to the production line	90°	90°
Cutting angle to the tread surface	20°- 30° manually adjustable	manually adjustable; depends on tread thickness (at approx. 50 mm a cutting angle of 30° is possible)
Line width mm	700	1000
Max. tread width, approx. mm	400	850
Mechan. length tolerance mm	+/- 1	+/- 1
Cutting knife diameter mm	400-500	400-500
Accuracy of cut length dependent on compound shrinkage or elongation mm	+/- 1,5	+/- 2
Number of cuts	26/min	18/min

The effective number of cuts (treads per minute) is determined by the line speed depending on length and width of the cut.
All dimensions are guide lines. Differences are possible.

TROESTER GmbH & Co. KG

Headquarters Hannover

Am Brabrinke 1-4

30519 Hannover, GERMANY

Phone +49 511 8704-0 Fax +49 511 864028-0

E-mail info@troester.de

TROESTER Machinery, Ltd.

300 Loomis Avenue

Cuyahoga Falls, Ohio 44221, USA

Phone +1-330-928-7790 Fax +1-330-928-7239

E-mail service@troester.us.com

TROESTER Machinery

(Shanghai) Co., Ltd.

Workshop No. 1, Area C

No. 6999 Chuan'sha Road, Pudong

Shanghai 201202, PR CHINA

Phone +86-21-58598308 Fax +86-21-58598310

E-mail info@troester.cn

TROESTER India Pvt. Ltd.

38, Sardar Patel Rd, Little Mount, Guindy, Nehru Nagar, Adyar, Chennai

600020, Tamil Nadu, INDIA

X-Compound GmbH

Hardmatt 932

CH -5082 Kaisten, Switzerland

Phone +41-62-869 10 30 Fax +41-62-874 32 08

E-mail info@x-compound.ch

© TROESTER GmbH & Co. KG 2025. The particulars in this catalog are for general information only. TROESTER GmbH & Co. KG assumes no liability for errors or omissions and reserves the right to make changes in design or specifications of the products at any time without prior notice.

www.troester.de

TROESTER

EXCELLENCE IN EXTRUSION.